




MPOP-12-FF/A-OS2-B

MPO-12 Patch Cable OS2, 12F, APC Female–Female, Type B, LSZH

Features

- LSZH jacket
- Cable outer diameter of 3.0 mm
- 12 fibers
- OS2 9/125µm
- Push-Pull Boot
- 100% tested (test report included)

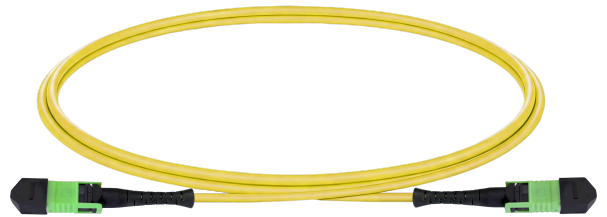

Beschreibung

The Lightwin MPO-12 patch cable with OS2 single-mode fibers is suitable for high-performance fiber-optic connections over longer distances. In combination with compatible QSFP transceivers featuring an MPO/APC interface, it enables the direct connection of switch ports, for example in 40G, 100G or 400G applications. The pre-terminated design with MPO female connectors and Type B polarity ensures fast plug-and-play installation and reliable data transmission.



MPOP-12-FF/A-OS2-B

MPO-12 Patch Cable OS2, 12F, APC Female–Female, Type B, LSZH

Technische Daten

Parameter	Wert
Jacket material	LSZH
Jacket color	Yellow
Fiber class	OS2
Outer diameter	3,0 mm
Fiber polish	APC (8°)
Fiber count	12
Form factor	MPO-12
Standards	IEC 61754-7, RoHS, REACH
Operating temperature	0°C - 60°C
Storage temperature	-20°C - 70°C
IL	< 0,6 dB
RL	> 60 dB
Polarity	B



MPOP-12-FF/A-OS2-B

MPO-12 Patch Cable OS2, 12F, APC Female–Female, Type B, LSZH

Artikelübersicht

Artikelnummer	EAN	Kurzbezeichnung
MPOP-12-FF/A-OS2-B 0.5	 9 1 2 0 1 3 8 8 9 8 4 1 4	0.5 m length
MPOP-12-FF/A-OS2-B 1.0	 9 1 2 0 1 3 8 8 9 8 4 3 8	1 m length
MPOP-12-FF/A-OS2-B 3.0	 9 1 2 0 1 3 8 8 9 8 4 2 1	3 m length
MPOP-12-FF/A-OS2-B 5.0	 9 1 2 0 1 3 8 8 9 8 4 4 5	5 m length