




PKW-PIMF-KAT6A GRAU

CAT6A HQ Patch Cable, S/FTP, LSOH, Lifetime Warranty, gray

Features

- Category 6A patch cable
- Shielding: S/FTP shielded
- 4 twisted pairs
- Cable gauge: AWG26, 100% copper
- Jacket: LSOH
- 12 different lengths, 9 different colors
- With innovative slim boot!

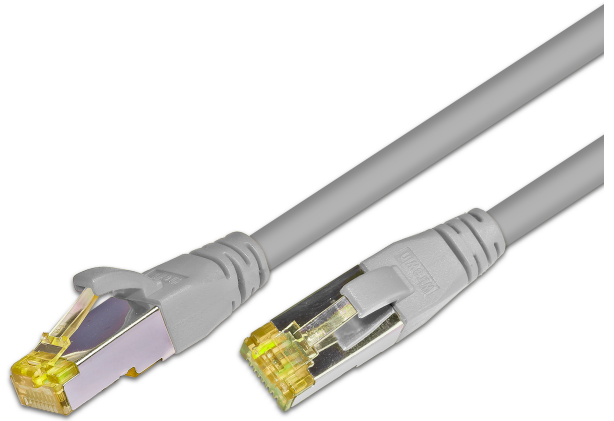

Description

Wirewin® Category 6A patch cables comply with the values specified in ISO/IEC 11801 Ed.2. This enables data transmission at 10 Gbit/s. Category 6A is specified up to 500 MHz. The cable used for these patch cables is double-shielded. Each pair has its own foil shield, with an additional braided shield around all pairs. This construction is often referred to as PIMF (Pairs in Metal Foil) or S/FTP. The cable jacket is made of halogen-free material and is therefore flame-retardant. Yellow Category 6A RJ45 connectors with gold-plated contacts are surrounded by a special Wirewin® strain-relief boot to protect the latch while still allowing it to be pressed easily. The cable length is printed on the underside of the boot. All Wirewin® CAT6A patch cables are supplied with a lifetime warranty!



PKW-PIMF-KAT6A GRAU

CAT6A HQ Patch Cable, S/FTP, LSOH, Lifetime Warranty, gray

Technical Data

Parameter	Value
Pin assignment	TIA/EIA 568 B
Color	Gray
Cable length	0,25 m / 0,5 m / 1,0 m / 1,5 m / 10,0 m / 15,0 m / 2,0 m / 20,0 m / 25,0 m / 3,0 m / 30,0 m / 35,0 m / 4,0 m / 5,0 m / 7,5 m
Cable type	4x2xAWG26/7
Category	CAT6A
Jacket	LSOH
Shielding	S/FTP shielded



PKW-PIMF-KAT6A GRAU

CAT6A HQ Patch Cable, S/FTP, LSOH, Lifetime Warranty, gray

Article Overview

Article Number	EAN	Short Description
PKW-PIMF-KAT6A 0.25	 9 1 2 0 0 4 6 9 8 2 5 3 3	0.25 m
PKW-PIMF-KAT6A 0.5	 9 1 2 0 0 4 6 9 8 2 5 4 0	0.5 m
PKW-PIMF-KAT6A 1.0	 9 1 2 0 0 4 6 9 8 2 5 5 7	1.0 m
PKW-PIMF-KAT6A 1.5	 9 1 2 0 0 4 6 9 8 2 5 6 4	1.5 m
PKW-PIMF-KAT6A 10.0	 9 1 2 0 0 4 6 9 8 2 5 7 1	10.0 m
PKW-PIMF-KAT6A 15.0	 9 1 2 0 0 4 6 9 8 2 5 8 8	15.0 m
PKW-PIMF-KAT6A 2.0	 9 1 2 0 0 4 6 9 8 2 5 9 5	2.0 m
PKW-PIMF-KAT6A 20.0	 9 1 2 0 0 4 6 9 8 2 6 0 1	20 m
PKW-PIMF-KAT6A 25.0	 9 1 2 0 0 4 6 9 8 2 6 1 8	25.0 m
PKW-PIMF-KAT6A 3.0	 9 1 2 0 0 4 6 9 8 2 6 2 5	3.0 m
PKW-PIMF-KAT6A 30.0	 9 1 2 0 0 4 6 9 8 2 6 3 2	30.0 m
PKW-PIMF-KAT6A 35.0	 9 1 2 0 0 6 4 0 1 0 3 3 1	35.0 m
PKW-PIMF-KAT6A 4.0	 9 1 2 0 0 4 6 9 8 2 6 4 9	4.0 m
PKW-PIMF-KAT6A 5.0	 9 1 2 0 0 4 6 9 8 2 6 5 6	5.0 m
PKW-PIMF-KAT6A 7.5	 9 1 2 0 0 4 6 9 8 2 6 6 3	7.5 m