




PKW-PIMF-KAT6 SCHWARZ

CAT6 Patch Cable, S/FTP, LSOH, Lifetime Warranty, black

Features

- Category 6 patch cable
- Shielding: S/FTP shielded
- 4 twisted pairs
- Cable gauge: AWG27, 100% copper
- Jacket: LSOH
- 17 different lengths, 12 different colors
- With innovative slim boot!

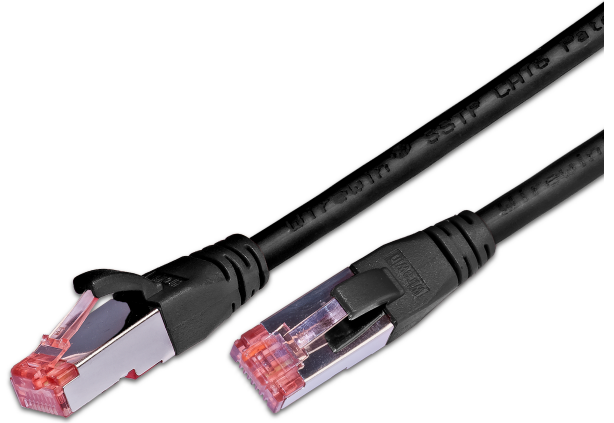

Description

Wirewin® Category 6 patch cables comply with the values specified in ISO/IEC 11801 Ed.2. This enables data transmission at 1 Gbit/s. Category 6 is specified up to 250 MHz. The cable used for these patch cables is double-shielded. Each pair has its own foil shield, with an additional braided shield around all pairs. This construction is often referred to as PIMF (Pairs in Metal Foil) or S/FTP. The cable jacket is made of halogen-free material and is therefore flame-retardant. Red Category 6 RJ45 connectors with gold-plated contacts are surrounded by a special Wirewin® strain-relief boot to protect the latch while still allowing it to be pressed easily. The cable length is printed on the underside of the boot. All Wirewin® CAT6 patch cables are supplied with a lifetime warranty!



PKW-PIMF-KAT6 SCHWARZ

CAT6 Patch Cable, S/FTP, LSOH, Lifetime Warranty, black

Technical Data

Parameter	Value
Pin assignment	TIA/EIA 568 B
Color	Black
Cable length	0,25 m / 0,5 m / 0,75 m / 1,0 m / 1,5 m / 10,0 m / 15,0 m / 2,0 m / 20,0 m / 25,0 m / 3,0 m / 30,0 m / 4,0 m / 5,0 m / 7,0 m
Cable type	4x2xAWG27/7
Category	CAT6
Jacket	LSOH
Shielding	S/FTP shielded



PKW-PIMF-KAT6 SCHWARZ

CAT6 Patch Cable, S/FTP, LSOH, Lifetime Warranty, black

Article Overview

Article Number	EAN	Short Description
PKW-PIMF-KAT6 0.25 SW	 9 1 2 0 0 4 2 3 6 7 9 4 5	0.25 m
PKW-PIMF-KAT6 0.5 SW	 9 1 2 0 0 4 2 3 6 8 0 6 5	0.5 m
PKW-PIMF-KAT6 0.75 SW	 9 1 2 0 0 4 2 3 6 8 1 8 8	0.75 m
PKW-PIMF-KAT6 1.0 SW	 9 1 2 0 0 4 2 3 6 8 3 0 0	1.0 m
PKW-PIMF-KAT6 1.5 SW	 9 1 2 0 0 4 2 3 6 8 4 2 3	1.5 m
PKW-PIMF-KAT6 10.0 SW	 9 1 2 0 0 4 2 3 6 8 5 4 6	10.0 m
PKW-PIMF-KAT6 15.0 SW	 9 1 2 0 0 4 2 3 6 8 6 6 9	15.0 m
PKW-PIMF-KAT6 2.0 SW	 9 1 2 0 0 4 2 3 6 8 7 8 2	2.0 m
PKW-PIMF-KAT6 20.0 SW	 9 1 2 0 0 4 2 3 6 8 9 0 4	20 m
PKW-PIMF-KAT6 25.0 SW	 9 1 2 0 0 4 2 3 6 9 0 2 4	25.0 m
PKW-PIMF-KAT6 3.0 SW	 9 1 2 0 0 4 2 3 6 9 1 4 7	3.0 m
PKW-PIMF-KAT6 30.0 SW	 9 1 2 0 0 4 2 3 6 9 2 6 0	30.0 m
PKW-PIMF-KAT6 4.0 SW	 9 1 2 0 0 4 2 3 6 9 3 8 3	4.0 m
PKW-PIMF-KAT6 5.0 SW	 9 1 2 0 0 4 2 3 6 9 5 0 5	5.0 m
PKW-PIMF-KAT6 7.0 SW	 9 1 2 0 0 4 2 3 6 9 7 4 1	7.0 m