


WKS JACK STP KAT6A

CAT6A 10 Gigabit Ethernet Keystone Module

Features

- Wiring: 4-pair AWG 23-22 according to T568A or T568B
- Cable diameter: continuously adjustable from 5 - 9.3 mm, straight cable entry
- Standards: Cat. 6A (subscript) IEC 60603-51 and ISO/IEC 11801:2002 + A1:2008
- Channel and permanent link Class EA according to ISO/IEC 11801:2002 + A1:2008, EN 50173-1
- PoE plus remote powering according to IEEE 802.3 af/at IEC 60512-99-001
- Dimensions: 35.1 x 14.5 x 18.4 mm
- Compact jack design - compatible with switch ranges
- Contacts: phosphor bronze with 50µm gold plating

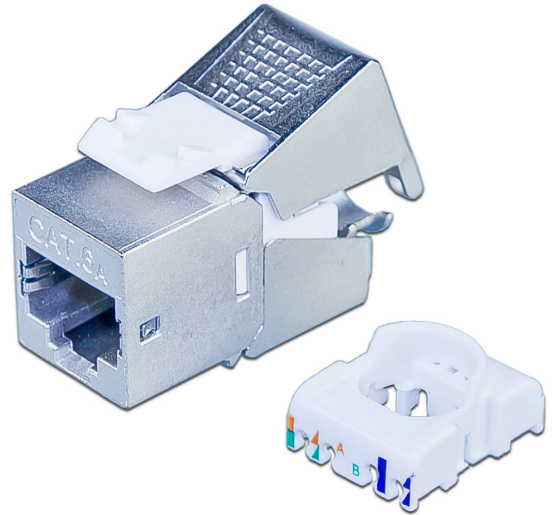

Description

This RJ45 Keystone module provides the user with a premium-quality RJ45 jack module. It can be terminated in approximately 1–2 minutes using side cutters. The freely accessible contact zone ensures perfect termination quality and therefore reliable transmission performance. 360° shield contact is also ensured. The special contact geometry in combination with a 50µm gold plating ensures 4PPoE in accordance with IEEE 802.3bt under all conditions. The housing material consists of nickel-plated die-cast zinc and therefore meets the highest environmental and mechanical requirements. In combination with the design-compatible module holder, it can be combined with all switch ranges.



WKS JACK STP KAT6A

CAT6A 10 Gigabit Ethernet Keystone Module

Technical Data

Parameter	Value
Connection type	IDC insulation displacement terminal
Design	Jack
AWG range	22 - 23
Pin assignment	TIA/EIA 568 A/B
Color	Gray
Suitable for flat cable	No
Suitable for stranded conductors	No
Suitable for solid conductors	Yes
Suitable for round cable	Yes
Shielded	Yes
Category	CAT.6A (IEC)
Product family	Keystone
Special tool required	No
Connector type	RJ45 8(8)
Transparent	No
EAN Number	9120072487224
Weight	0.02 kg