WKS JACK STP KAT6

CAT6 Gigabit Ethernet Keystone Module, shielded

Features

- Wiring: 4-pair AWG 23-22 according to T568A or T568B
- Cable diameter: continuously adjustable from 5 - 9.3 mm, straight cable entry
- Standards: Category 6
- Channel and permanent link Class E according to ISO/IEC 11801, EN 50173,
- PoE plus remote powering according to IEEE 802.3 af/at IEC 60512-99-001
- Dimensions: 35.1 x 14.5 x 18.4 mm
- Compact jack design - compatible with switch ranges
- Contacts: phosphor bronze with 50μm gold plating

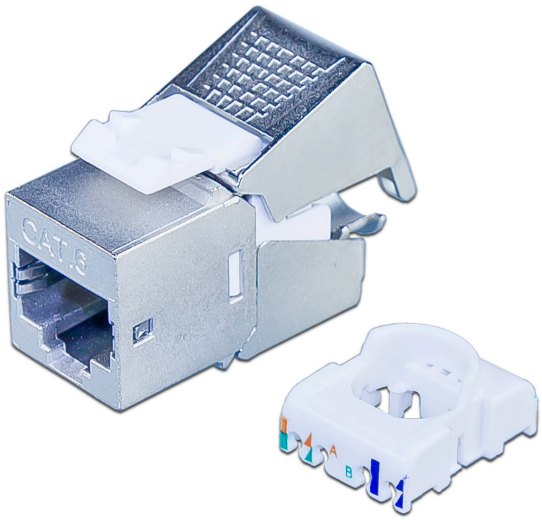

Description

This RJ45 Keystone module provides the user with a premium-quality RJ45 jack module. It can be terminated in approximately 1–2 minutes using side cutters. The freely accessible contact zone ensures perfect termination quality and therefore reliable transmission performance. 360° shield contact is also ensured. The special contact geometry in combination with a 50μm gold plating ensures 4PPoE in accordance with IEEE 802.3bt under all conditions. The housing material consists of nickel-plated die-cast zinc and therefore meets the highest environmental and mechanical requirements. In combination with the design-compatible module holder, it can be combined with all switch ranges.

All names and symbols mentioned here are property of the respective manufacturer.
Printing errors, changes & errors excepted.

WKS JACK STP KAT6

CAT6 Gigabit Ethernet Keystone Module, shielded

Technical Data

Parameter	Value
Connection type	IDC insulation displacement terminal
Design	Jack
AWG range	22 - 23
Pin assignment	TIA/EIA 568 A/B
Suitable for flat cable	No
Suitable for stranded conductors	No
Suitable for solid conductors	Yes
Suitable for round cable	Yes
Shielded	Yes
Category	CAT.6
Material	Metal
Product family	Keystone
Special tool required	No
Connector type	RJ45 8(8)
Transparent	No
EAN Number	9120072487217
Weight	0.02 kg

All names and symbols mentioned here are property of the respective manufacturer.
Printing errors, changes & errors excepted.